

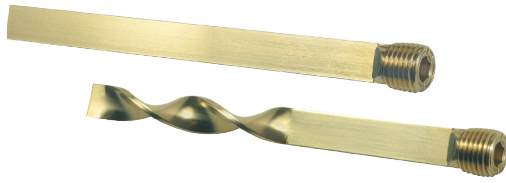


# BAFFLES

## NPT SERIES

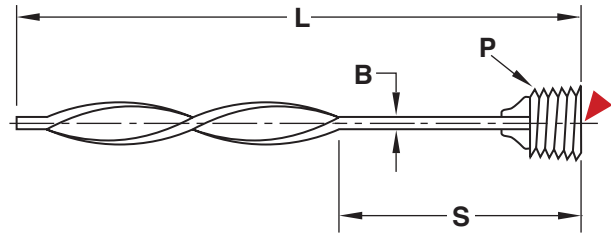

Progressive Baffles feature patented XT Extra torque technology. A deeper socket and keyed design provide 3 times the torque over brazed baffles of the past.

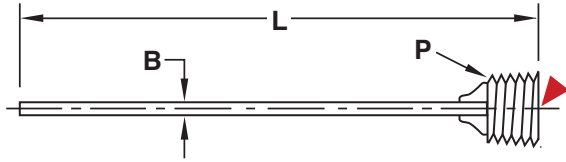

### Straight

**M** Brass

CAD insertion point

CATALOG NUMBER	P Plug Size (NPT)	L Overall Length	B Blade Thickness	Blade Width -.005 -.010
SB06L4	1/16-27	4	.057	.250
SB06L8	1/16-27	8	.057	.250
SB06L12	1/16-27	12	.057	.250
SB12L4	1/8-27	4	.057	.312
SB12L8	1/8-27	8	.057	.312
SB12L12	1/8-27	12	.057	.312
SB25L5	1/4-18	5	.085	.437
SB25L10	1/4-18	10	.085	.437
SB25L15	1/4-18	15	.085	.437
SB37L6	3/8-18	6	.093	.562
SB37L12	3/8-18	12	.093	.562
SB37L18	3/8-18	18	.093	.562
SB50L8	1/2-14	8	.093	.687
SB50L16	1/2-14	16	.093	.687
SB75L12	3/4-14	12	.093	.937
SB75L20	3/4-14	20	.093	.937
SB100L16	1-11 1/2	16	.093	1.125
SB100L24	1-11 1/2	24	.093	1.125
SB125L16	1 1/4-11 1/2	16	.093	1.484
SB125L24	1 1/4-11 1/2	24	.093	1.484

### Turbo

**M** Brass

CAD insertion point

CATALOG NUMBER	P Plug Size (NPT)	L Overall Length	S Straight Length	B Blade Thickness	Blade Width -.005 -.010
TB06L4	1/16-27	4	2	.057	.250
TB06L8	1/16-27	8	4	.057	.250
TB06L12	1/16-27	12	6	.057	.250
TB12L4	1/8-27	4	2	.057	.312
TB12L8	1/8-27	8	4	.057	.312
TB12L12	1/8-27	12	6	.057	.312
TB25L5	1/4-18	5	2	.085	.437
TB25L10	1/4-18	10	4	.085	.437
TB25L15	1/4-18	15	6	.085	.437
TB37L6	3/8-18	6	2	.093	.562
TB37L12	3/8-18	12	4	.093	.562
TB37L18	3/8-18	18	6	.093	.562
TB50L8	1/2-14	8	3	.093	.687
TB50L16	1/2-14	16	5	.093	.687
TB75L12	3/4-14	12	4	.093	.937
TB75L20	3/4-14	20	6	.093	.937
TB100L16	1-11 1/2	16	5	.093	1.125
TB100L24	1-11 1/2	24	8	.093	1.125
TB125L16	1 1/4-11 1/2	16	5	.093	1.484
TB125L24	1 1/4-11 1/2	24	8	.093	1.484

## BLADE MATERIAL

CATALOG NUMBER	B Blade Thickness	Blade Width -.005 -.010
BM06	.057	.250
BM12	.057	.312
BM25	.085	.437
BM25-B	.085	.421
BM37	.093	.562
BM50	.093	.687
BM75	.093	.937
BM75-B	.093	.906
BM100	.093	1.125
BM125	.093	1.484



### Alternative configurations and materials available:

- Straight Baffle Blade Material: Order according to the chart at left. Material is sold in 36" lengths, and other lengths can be provided upon request.
- For Baffles with brass blades and stainless steel pipe plugs, add an "-SS" to the end of the catalog number. Ex. SB25L5-SS or TB75L12-SS. Call for pricing on 1-1/4 baffles with stainless steel pipe plugs.
- Baffles can be ordered cut to any length, in any quantity. To order, specify the prefix and plug size and the required length. For Turbo Baffles, the closest straight length (S) is used, but can be provided to a different length, upon request. Ex. SB25L6.25 or TB37L5.75-SS (with a 2" "S" dimension)
- BSPT plug baffles are sold separately on page E-3.